


Washer Light Series

CA11D34.11

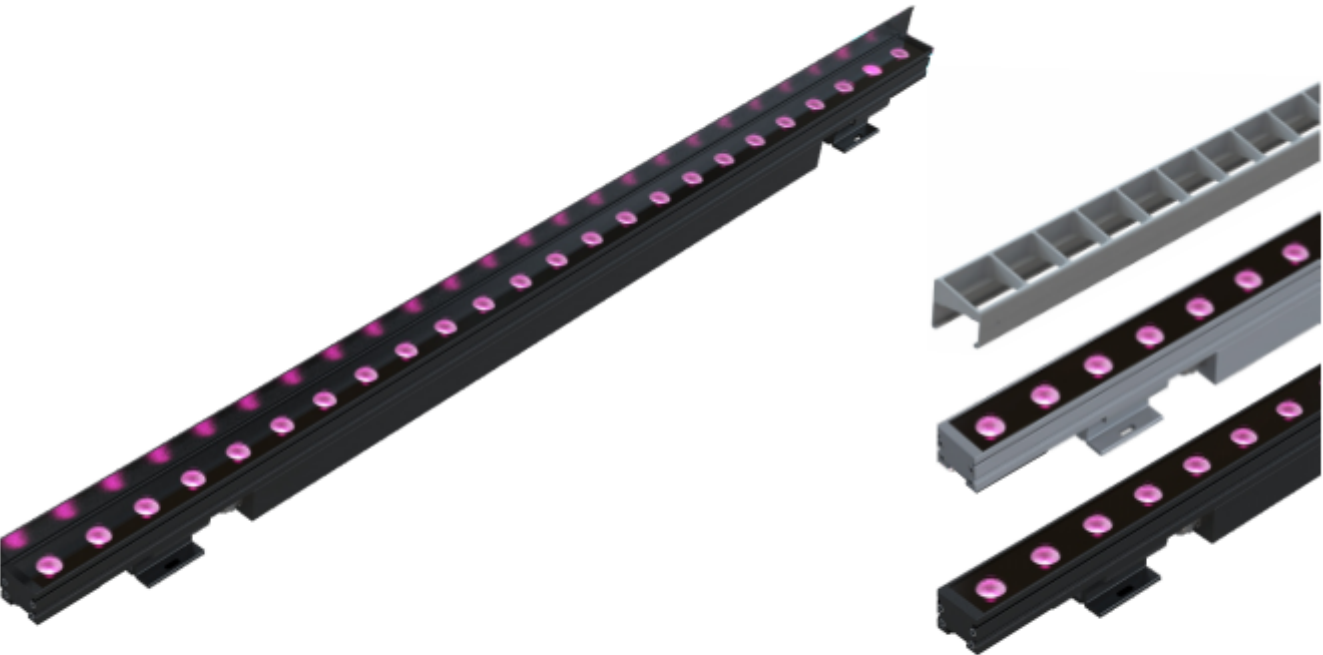

24V

DC

VOLTAGE

IP65[†]

UP TO 90%

WATER PROOF

2500K

2700K

3000K

3500K

4000K

SDCM

3 STEP

DMX


Bluetooth APP control

CAS A MB


RoHS

CE


Distribution Curve Flux

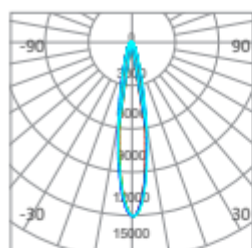


Average Beam Angle(50%): 18.1 DEG
Beam angle:15°
Efficacy:93.29lm/W



Average Beam Angle(50%): 68.1 DEG
Beam angle:60°
Efficacy:80.69lm/W




Average Beam Angle(50%): 25.5 DEG
Beam angle:15°30°
Efficacy:89.83lm/W




Average Beam Angle(50%): 32.2 DEG
Beam angle:15°60°
Efficacy:74.70lm/W


Accessories




Low-Profile
Bracket




Bracket




Bracket




High-Profile
Bracket



Adjustable bracket

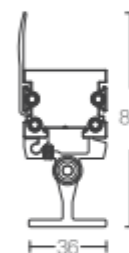





Baffle

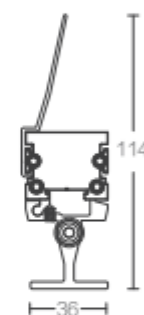


High-Profile
Baffle

Mounting:Bracket installation

The wall washer light has strong adaptability, which can flexibly cope with various installation environments such as walls, eaves and brackets. Meanwhile, it provides multiple installation methods including wall-mounted, embedded and hoisting for selection, meeting the needs of different scenarios.

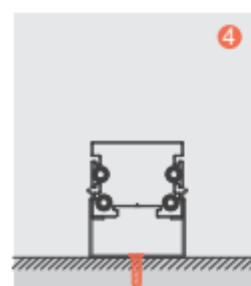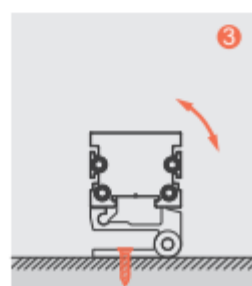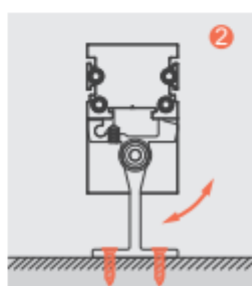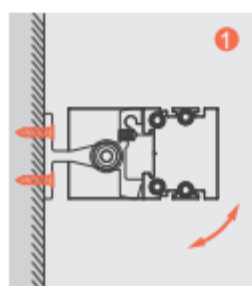

Overall Dimension (mm)

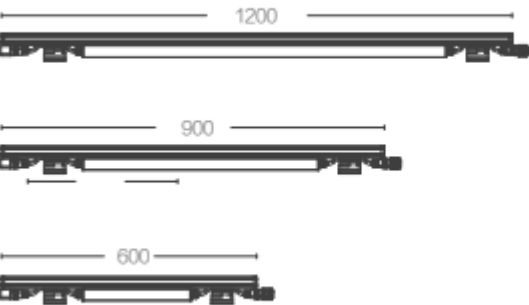

Product Features

- 1. Combined RGBW sources create perfectly blended color effects.
- 2. Multiple beam angles for precise control
- 3. Optional anti-glare louvers or baffle for visual comfort
- 4. Multiple mounting options for flexible installation
- 5. Offered in both low and line voltage versions.

Usage scenarios

Ideal for architectural, commercial, industrial/heritage lighting, landscape, and facade lighting